






V-INTERLOCK
INSTALLATION
INSTRUCTIONS

■ V-INTERLOCK BLOCKS

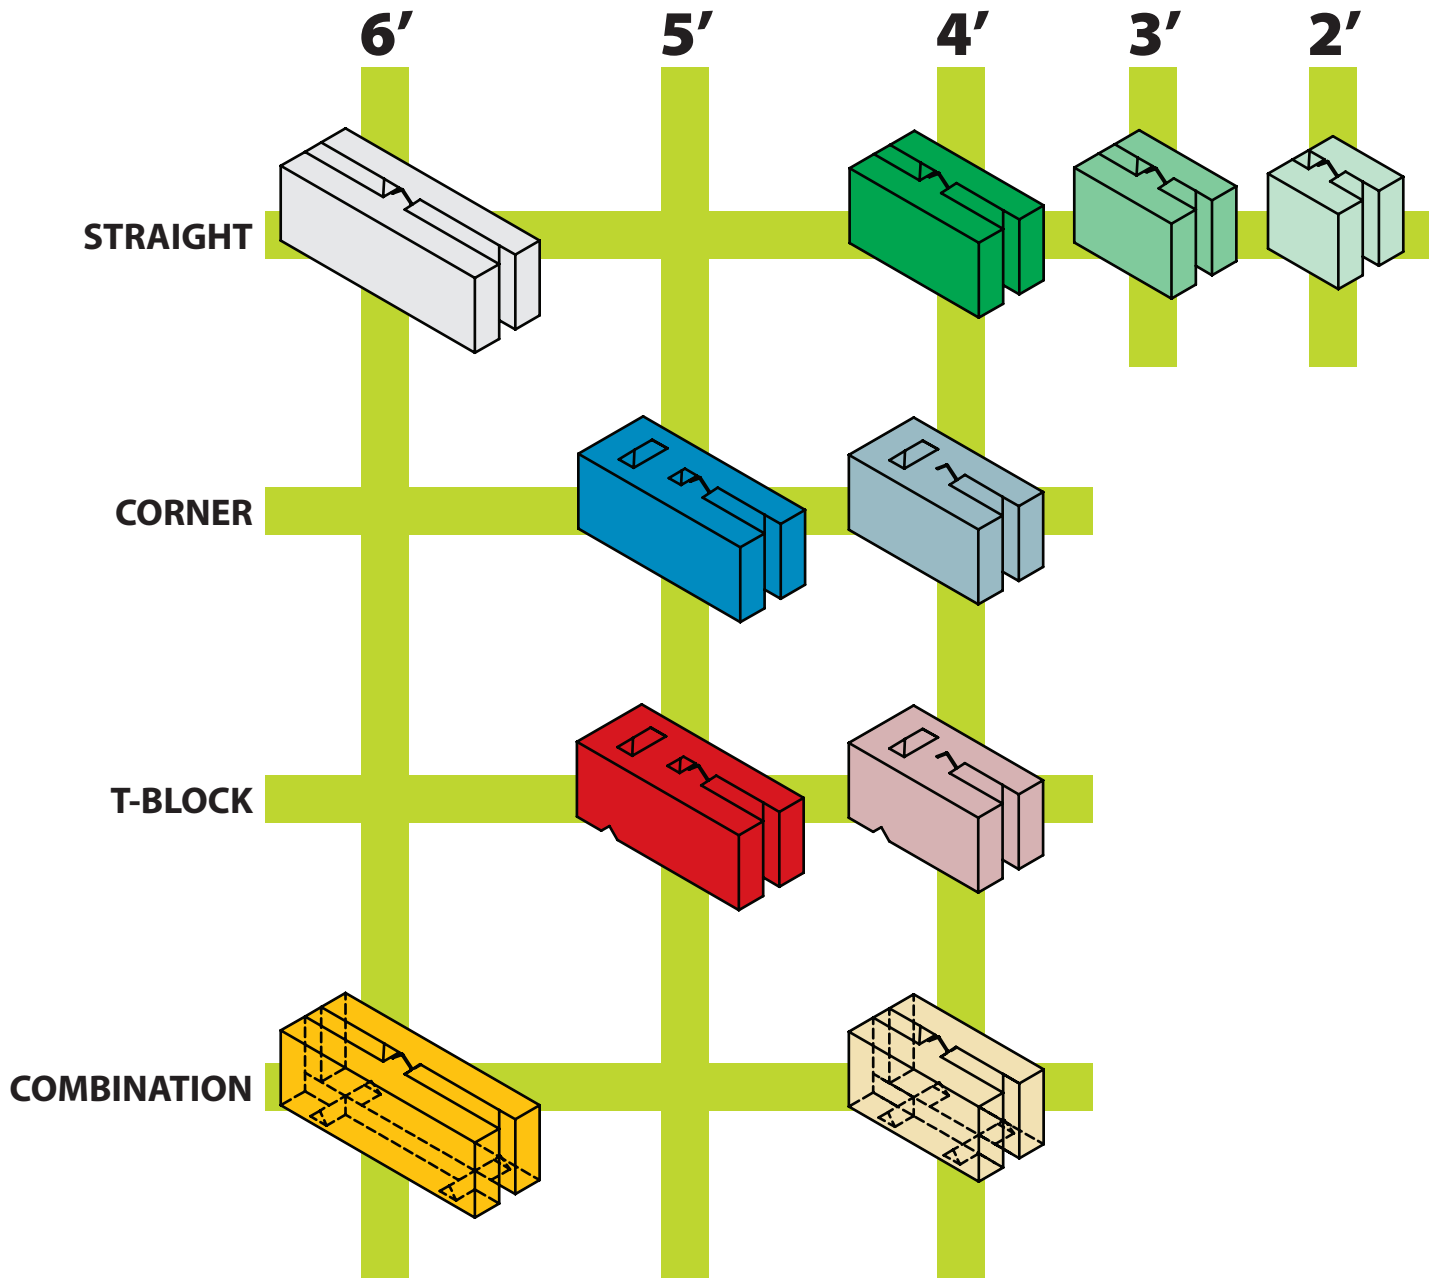

V-INTERLOCK STRAIGHT WALL

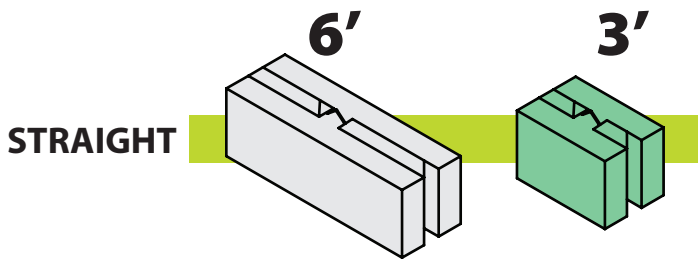
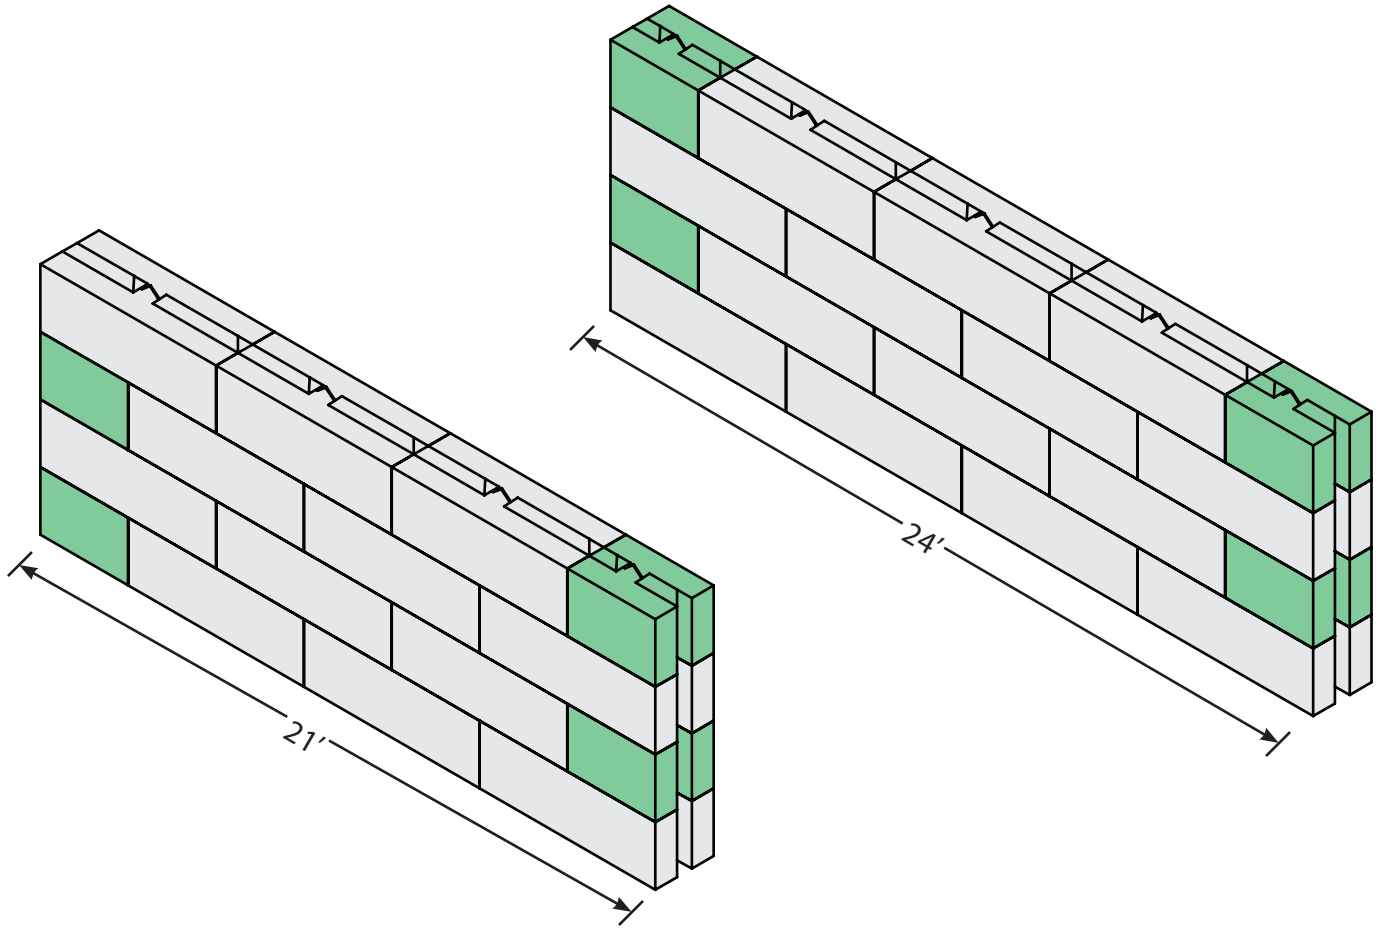


STRAIGHT

Straight walls with a running bond pattern are created with 6' blocks making up the main portion of the wall and 3' blocks filling in the gaps at the ends of the wall. Walls can be as short as 6' long and increase in length at intervals of 3'. Length is dependant on whether the 3' end blocks are used on alternating courses or on the same course.



This layout is only intended to show how each block is used. It is only one example of the infinite ways the V-Interlock Blocks can be configured. Your wall layout may differ from this.

■ V-INTERLOCK CORNER WALL

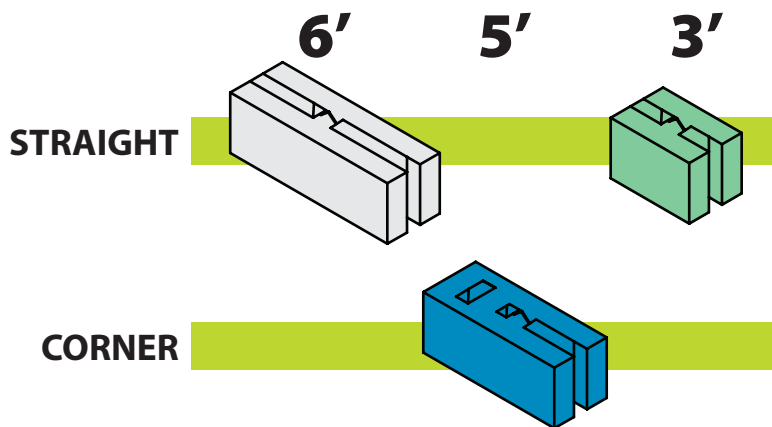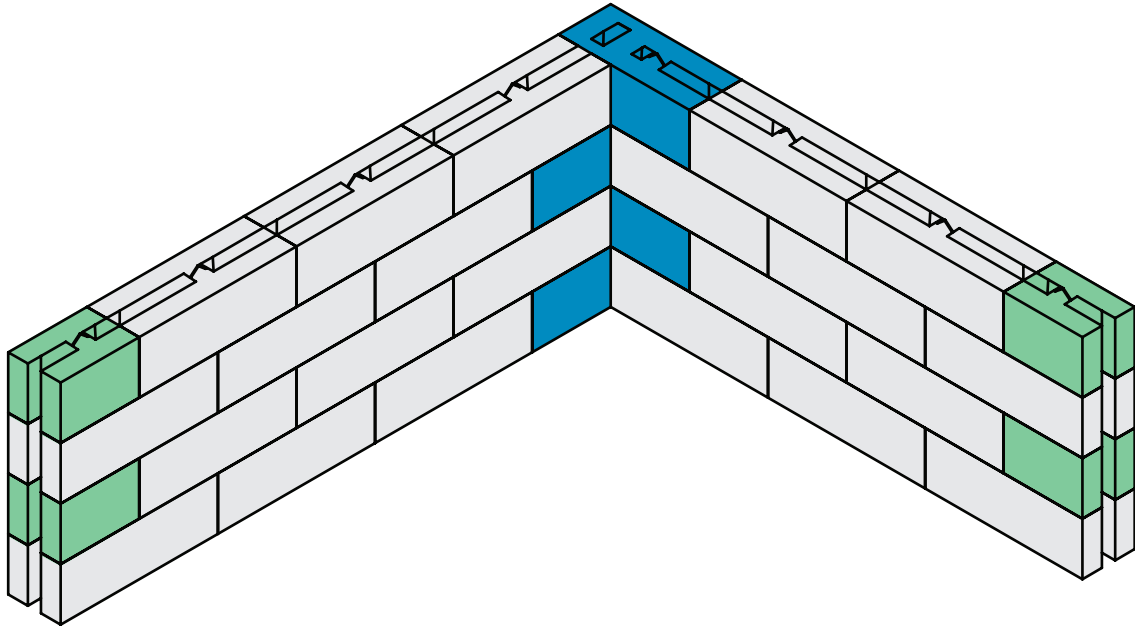

The corner block has a section of the male V turned 90 to accept the female V of the block above it. A 2' section of the corner block overlaps the corner block below it, leaving a 3' length to maintain the running bond of the straight section of wall.



This layout is only intended to show how each block is used. It is only one example of the infinite ways the V-Interlock Blocks can be configured. Your wall layout may differ from this.

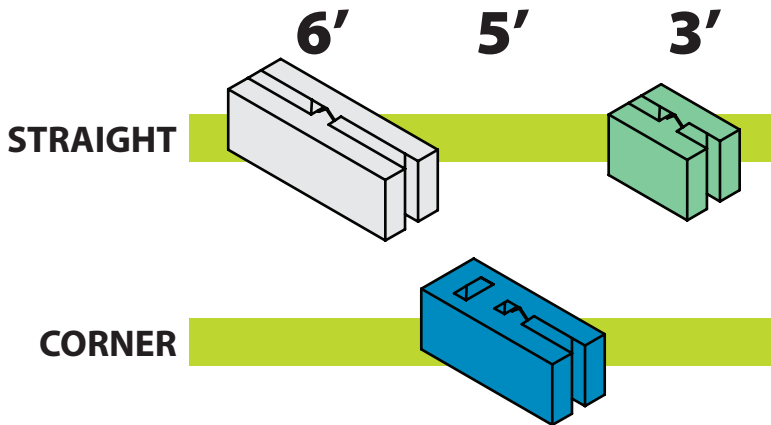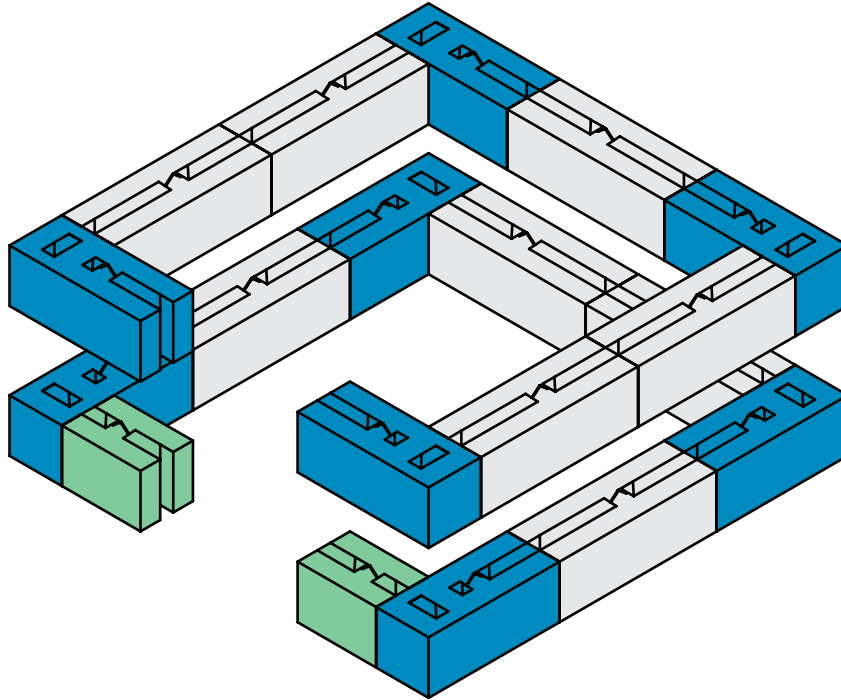

Four corner walls create an enclosure. The back wall needs to be long enough to allow for an opening on the other side.

This layout is only intended to show how each block is used. It is only one example of the infinite ways the V-Interlock Blocks can be configured. Your wall layout may differ from this.

■ V-INTERLOCK DIVIDER BIN

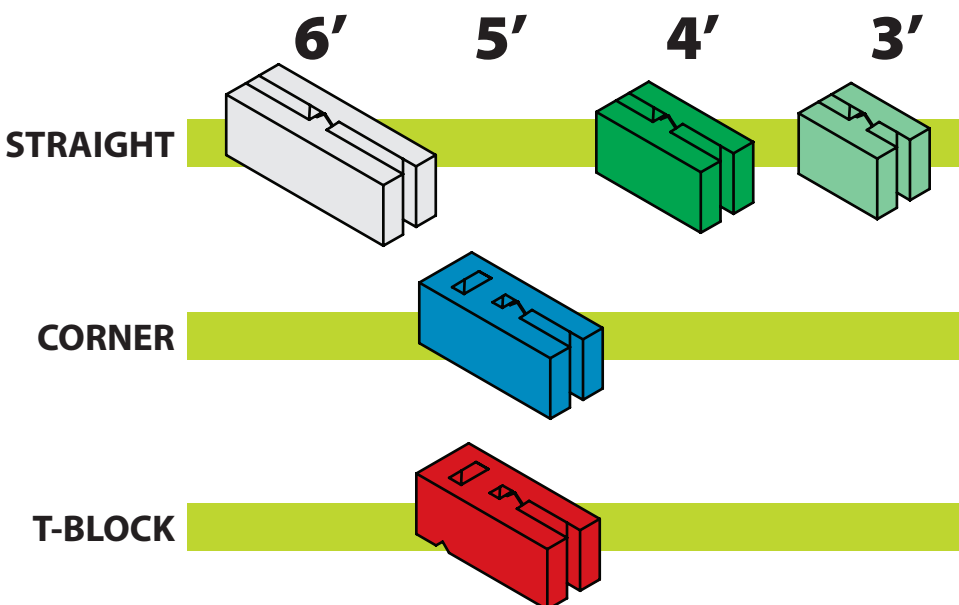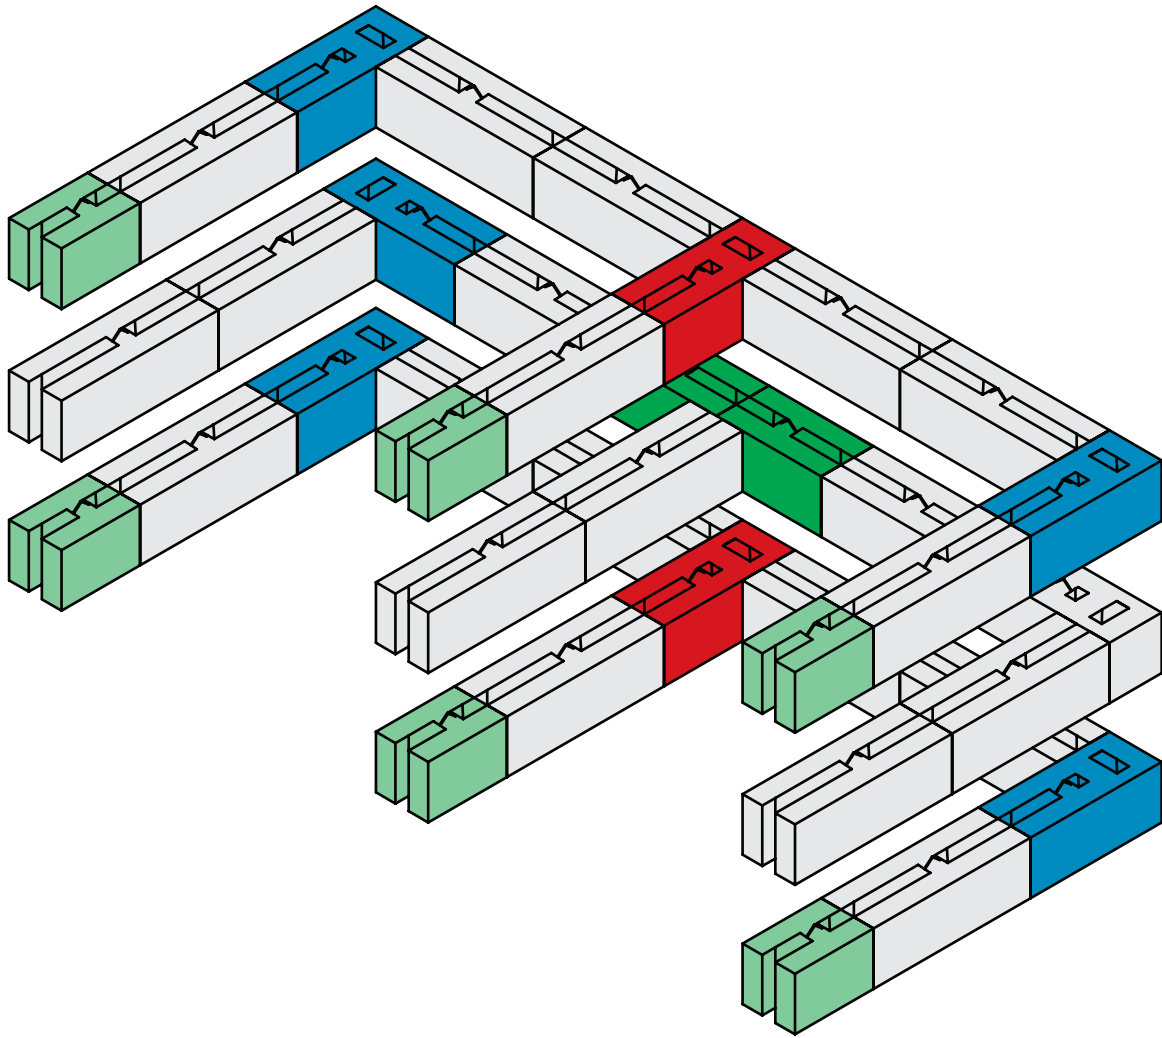



The design of a divider bin will require the use of T-blocks. The T-block has both the male and female turned 90 to accept the female V of the blocks above and below it. Because of the width of the blocks, a true running bond pattern cannot be maintained along the back wall.

This layout is only intended to show how each block is used. It is only one example of the infinite ways the V-Interlock Blocks can be configured. Your wall layout may differ from this.




V-INTERLOCK COMBINATION BLOCKS



USED FOR CORNERS

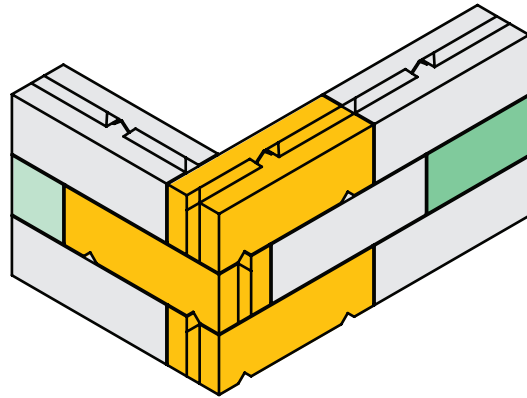

USED FOR T-JUNCTIONS

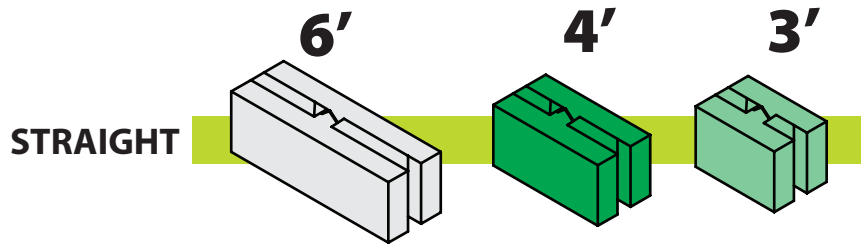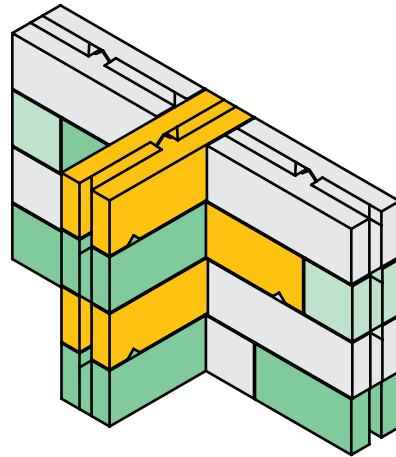


STRAIGHT

The combination block has a female V running along the length of the bottom of the block as well as 2 female Vs turned 90 at each end.

It can be used as a straight, corner and T block.

COMBINATION



Special consideration should be taken when using combination blocks in corners and T-junctions. Note that a running bond pattern cannot be maintained using this block.

This layout is only intended to show how each block is used. It is only one example of the infinite ways the V-Interlock Blocks can be configured. Your wall layout may differ from this.